

Smart Interactive Display

MW3598-M-S




Specifications

Model	MW3598-M-S
Panel	
Panel size	98 inches
Resolution	3840*2160
Aspect Ratio	16:9
Brightness (cd/m²)	450
Contrast ratio	1200:1
Response time (ms)	8
Refresh frequency	60Hz
Color support	1.07B
Viewing angle (H/V)	178°/178°
Android	
CPU	RK3588, quad-core Cortex-A76(2.4GHz)+quad-core Cortex-A55(1.8GHz)
GPU	ARM Mali-G610 MC4
RAM/ROM	DDR4: 16GB EMMC:256GB
Android version	Android 13.0

Touch	
Touch control	Infrared touch screen, 20-point multi-touch
Touch precision (mm)	±2
Glass	4mm tempered glass, level 7 on Mohs hardness scale, anti-glare
Response time (ms)	≤8
Touchscreen input	Opaque objects (e.g. finger, pen, etc.)
Interface	
Front interface	3*USB 3.0、1*TYPE C、1*TOUCH USB、1*HDMI IN
Rear interface	1*Line OUT、2*RJ45、1*PC Audio IN、1*VGA、1*USB 2.0、1*OPTICAL OUT、1*RS232、3*TOUCH、2*TYPE C、3*HDMI IN、1*HDMI OUT、1*DP IN、2*USB 3.0
Audio	
Speaker	2*15W+20W
Camera & Microphone	
Pixel	13MP Android: Pixel 13MP for Photos & 8MP for Video Windows: Pixel 13MP for Photos & 13MP for Video
viewing angle	D=123° , H=100° , V=77°
Microphone array	8
Pickup distance	8
Smart function	Auto Framing; Speaker Tracking;
NFC function	
NFC	Support screen mirroring by Android phones
WiFi	
WiFi	Support WiFi6
Operating Frequency	Wi-Fi STA : IEEE802.11a/b/g/n/ac/ax Wi-Fi AP : IEEE802.11 b/g/a/n/ac
OSD	
Language supported	Simplified Chinese, English, and others Language
VESA	
Wall mount hole (mm)	600*400mm
General	
Power supply	AC 100~240V, 50/60Hz
Maximum power consumption (W)	≤440

Standby power consumption (W)	<0.5
Operating temperature	0 to 40°C
Operating humidity	10% to 85% (non-condensing)
Storage temperature	-20 to 60°C
Storage humidity	5% to 90% (non-condensing)
Product dimensions (W*H*D)(mm)	2216*1339.4*97.9mm
Package dimensions (W*H*D)(mm)	2356*1441.5*230mm
Weight (kg)	Net weight:92 Gross weight:110
Accessories included	1* wall mount, 1* remote control, 2*Touch pen, 1* Quick Start,

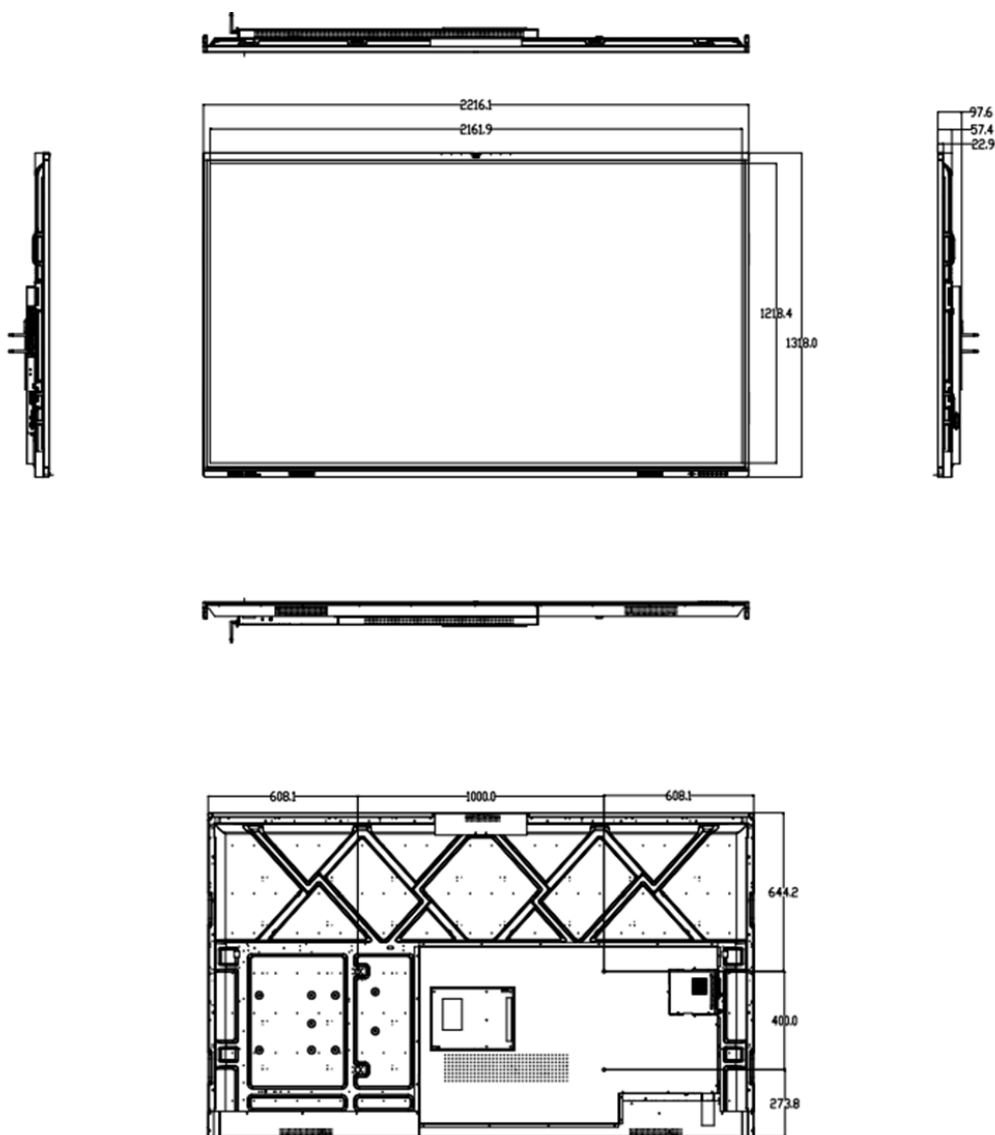

Zhejiang Uniview Technologies Co.,Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2022 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.